

### TB, RAM & CM ULTRAVIOLET FIXTURES

The TB in-room fixtures control tuberculosis, as well as other airborne pathogens and mold.



Models **TB-W** are designed to be wall-mounted to reduce upper air contamination. TB-W fixtures feature adjustable louvers to allow unlimited direction of the ultraviolet rays while protecting personnel and providing maximum germicidal irradiation. The units are constructed of 304 stainless steel with an alzak aluminum reflector. They mount 7 feet above the floor and use SBL lamps. Re-

lamping requires only disconnecting the power and lowering the hinged front louver. TB-W fixtures are shipped assembled and include a grounded power cord, pull-chain switch, ultraviolet lamp and louver.


Model **RAM36-2** is a totally enclosed air-movement UV system. This fixture comes complete with filters, fans and 2 ultraviolet lamps. It is designed for rooms where congestion or ceiling height prohibits the use of wall-mounted indirect fixtures. Constructed of 304 stainless steel, each fixture produces four or more air changes per hour in rooms up to 200 square feet.



#### Technical Data

Model	TB-12-W	TB-24-W	TB-36-W	RAM36-2
Lamp #	SBL060	SBL325	SBL005	SBL420
Lamp Life	17,000 hours	17,000 hours	17,000 hours	17,000 hours
Lamp Intensity	50 $\mu\text{W}/\text{cm}^2$	100 $\mu\text{W}/\text{cm}^2$	175 $\mu\text{W}/\text{cm}^2$	120 $\mu\text{W}/\text{cm}^2$
Air Movement	Convection	Convection	Convection	100 CFM
Sq. Ft. Coverage	75 sq. ft.	200 sq. ft.	300 sq. ft.	200 sq. ft.
Electrical	120/277V, 60Hz or 220V, 50Hz			
Construction	All units are made of 304 Stainless Steel			
Lamp replacement	Lamp replacement before the end of effective lamp life is strongly recommended			

#### TB-36-W Installation Template

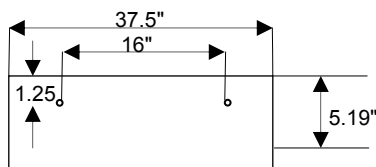

TB-36-W mounts via two keyhole slots in the back of the unit. These holes are on 16" center and require # 8 anchor screws. The unit weighs 25 lbs so the wall should be able to hold it.

When installing the UV lamp or relamping use cotton gloves or make sure not to touch the lamp. Fingerprints on the germicidal UV lamp will reduce the ultraviolet output.

The **TB-12-W / 24-W / 36-W** should never be installed less than 7 feet from the floor.

#### CM15 CORNER MOUNTED FIXTURE



**CM15** is designed to mount in room corners with two keyhole slots at 7 ft. This fixture incorporates a GML500 lamp and covers 75 - 100 square feet. The CM15 fixture comes complete with an eight-foot power cord and an on/off switch. The louver restricts and concentrates the ultraviolet rays above eye level so **personnel can occupy the room** while the fixture is on.



**RAM, TB & CM FIXTURES PRICES**

In-room fixtures can be used continuously to reduce air contamination. SBL germicidal UV lamps emitting at 254 nm are effective for 17,000 hours. Lamps will continue to operate after effective operating hours, however 254 nm output is not being emitted. Clean, monitor and check lamps regularly. Please, **specify voltage when ordering**.

Length	Model	Description	
48"		Enclosed stainless steel fixture with two lamps, fans, and filters effective up to 200 square feet	
	<b>RAM36-2-120</b>	120V, 60Hz with two UV lamps	
	<b>RAM36-2-230</b>	220V, 50Hz with two UV lamps	
	<b>FLT065</b>	Filter - 2 required 6¼" x 6¼" x 1¾"	
	<b>FAN025B</b>	Replacement Fan (2 required)	
	<b>SBL420</b>	Germicidal UV replacement lamp (2 required)	
37.5"		Louvered, wall mounted stainless steel fixture with 1 UV lamp - effective up to 300 square feet	
	<b>TB-36-W</b>	120V, 60Hz with one UV lamp	
	<b>TB-36-W/277</b>	277V, 60Hz with one UV lamp	
	<b>TB-36-W/50</b>	220V, 50Hz with one UV lamp	
	<b>SBL005</b>	Germicidal UV replacement lamp (1) + \$60 if coated	
27.75"		Louvered, wall mounted stainless steel fixture with 1 UV lamp - effective up to 200 square feet	
	<b>TB-24-W</b>	120V, 60Hz with one UV lamp	
	<b>TB-24-W/277</b>	277V, 60Hz with one UV lamp	
	<b>TB-24-W/50</b>	220V, 50Hz with one UV lamp	
	<b>SBL325</b>	Germicidal UV replacement lamp (1) + \$40 if coated	
18.5"		Louvered, wall mounted stainless steel fixture with 1 UV lamp - effective up to 100 square feet	
	<b>TB-12-W</b>	120V, 60Hz with one UV lamp	
	<b>TB-12-W/277</b>	277V, 60Hz with one UV lamp	
	<b>TB-12-W/50</b>	220V, 50Hz with one UV lamp	
	<b>SBL060</b>	Germicidal UV lamp (1) + \$30 coated	
14"		Louvered, corner mounted fixture with one UV lamp - effective for 100-150 square feet	
	<b>CM15</b>	120V, 60Hz	
	<b>CM15/220</b>	230V, 50Hz	
	<b>GML500</b>	Germicidal UV lamp with threaded base for CM15	
	<b>GML505</b>	185nm UV lamp with threaded base (VH Ozone)	
	<b>GML510</b>	Germicidal UV replacement lamp for CM15/220	